

金属化聚酯薄膜电容器

型号: **CL20**

金属化聚酯薄膜、无感扁轴向结构、阻燃胶带包封

■特点

- 良好自愈特性
- 卓越的电性能


■用途

- 应用于音频电路中
- 广泛应用于一般电子电路中

■产品码构成

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
M	C	L	2	0												
型 号				额定电压			容量			品级	宽度		颜色	识别码		

■引脚方式

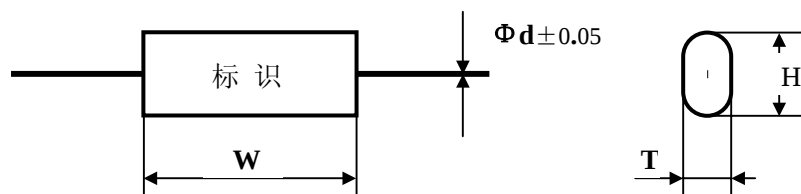

单位: mm

■额定值、尺寸表

●额定电压 100VDC、容量偏差 J (±5%)、K (±10%)、M (±20%)

产 品 码	容 量 (μF)	尺 寸 (mm)				备 注
		$W_{\max}$	$H_{\max}$	$T_{\max}$	Φd	
MCL20100154□13□00	0.15	13	7.6	3.7	0.6	
MCL20100224□13□00	0.22	13	8.3	4.5	0.6	
MCL20100224□15□00	0.22	15	7.8	4.0	0.6	
MCL20100334□15□00	0.33	15	8.5	4.6	0.6	
MCL20100474□15□00	0.47	15	9.5	5.5	0.6	
MCL20100564□15□00	0.56	15	10.3	5.6	0.6	
MCL20100564□20□00	0.56	20	9.2	4.5	0.8	
MCL20100684□20□00	0.68	20	10.8	4.5	0.8	
MCL20100824□20□00	0.82	20	11.2	5.0	0.8	
MCL20100105□15□00	1	15	16.0	6.5	0.6	
MCL20100105□20□00	1	20	10.7	6.0	0.8	
MCL20100155□20□00	1.5	20	10.3	6.7	0.8	
MCL20100225□20□00	2.2	20	14.5	8.3	0.8	
MCL20100225□27□00	2.2	27	13.0	7.0	0.8	
MCL20100335□25□00	3.3	25	16.0	8.1	0.8	
MCL20100335□27□00	3.3	27	15.4	7.6	0.8	
MCL20100475□27□00	4.7	27	17.1	9.3	0.8	
MCL20100475□32□00	4.7	32	15.8	8.0	0.8	
MCL20100565□32□00	5.6	32	16.6	8.9	0.8	
MCL20100685□32□00	6.8	32	18.7	9.3	0.8	
MCL20100685□36□00	6.8	36	17.8	8.4	0.8	
MCL20100106□32□00	10	32	26.4	11.7	0.8	
MCL20100106□36□00	10	36	25.1	10.5	0.8	
MCL20100156□36□00	15	36	28.3	13.4	0.8	
MCL20100226□36□00	22	36	32.0	16.7	0.8	

■额定值、尺寸表

●额定电压 250VDC、容量偏差 J (±5%)、K (±10%)、M (±20%)

产 品 码	容 量 (μF)	尺 寸 (mm)				备 注
		$W_{\max}$	$H_{\max}$	$T_{\max}$	Φd	
MCL20250473□13□00	0.047	13	7.4	3.6	0.6	
MCL20250104□13□00	0.1	13	8.7	5.0	0.6	
MCL20250104□15□00	0.1	15	9.0	4.0	0.6	
MCL20250154□15□00	0.15	15	10.0	5.3	0.6	
MCL20250224□15□00	0.22	15	10.4	6.6	0.6	
MCL20250224□20□00	0.22	20	9.2	4.6	0.8	
MCL20250334□20□00	0.33	20	10.1	5.5	0.8	
MCL20250474□20□00	0.47	20	11.1	6.5	0.8	
MCL20250684□20□00	0.68	20	13.0	7.5	0.8	
MCL20250684□27□00	0.68	27	11.7	5.5	0.8	
MCL20250824□20□00	0.82	20	14.2	8.0	0.8	
MCL20250824□27□00	0.82	27	12.0	6.4	0.8	
MCL20250105□20□00	1	20	15.0	9.0	0.8	
MCL20250105□25□00	1	25	14.5	6.6	0.8	
MCL20250105□27□00	1	27	13.0	6.7	0.8	
MCL20250155□25□00	1.5	25	15.0	9.0	0.8	
MCL20250155□27□00	1.5	27	14.5	8.5	0.8	
MCL20250155□32□00	1.5	32	13.5	7.3	0.8	
MCL20250225□25□00	2.2	25	18.0	10.2	0.8	
MCL20250225□27□00	2.2	27	17.4	9.6	0.8	
MCL20250225□32□00	2.2	32	16.1	8.3	0.8	
MCL20250275□32□00	2.7	32	17.1	9.3	0.8	
MCL20250335□27□00	3.3	27	19.8	12.1	0.8	
MCL20250335□32□00	3.3	32	18.2	10.4	0.8	
MCL20250475□32□00	4.7	32	21.4	12.1	0.8	
MCL20250475□36□00	4.7	36	20.2	10.9	0.8	
MCL20250685□32□00	6.8	32	24.2	15.0	0.8	
MCL20250685□36□00	6.8	36	23.0	13.5	0.8	
MCL20250106□32□00	10	32	28.0	18.6	0.8	
MCL20250106□36□00	10	36	26.1	16.8	0.8	
MCL20250156□46□00	15	46	27.0	17.6	0.8	

■额定值、尺寸表

●额定电压 400VDC、容量偏差 J (±5%)、K (±10%)、M (±20%)

产 品 码	容 量 (μF)	尺 寸 (mm)				备 注
		$W_{\max}$	$H_{\max}$	$T_{\max}$	Φd	
MCL20400333□13□00	0.033	13	7.1	4.2	0.6	
MCL20400473□13□00	0.047	13	7.8	5.0	0.6	
MCL20400473□15□00	0.047	15	8.0	4.3	0.6	
MCL20400683□15□00	0.068	15	8.7	5.0	0.6	
MCL20400683□13□00	0.068	13	10.0	5.7	0.6	
MCL20400104□15□00	0.1	15	9.7	6.0	0.6	
MCL20400154□15□00	0.15	15	11.5	7.0	0.6	
MCL20400154□20□00	0.15	20	9.5	5.0	0.8	
MCL20400224□20□00	0.22	20	12.1	6.0	0.8	
MCL20400224□27□00	0.22	27	9.2	4.7	0.8	
MCL20400334□20□00	0.33	20	12.7	6.7	0.8	
MCL20400334□27□00	0.33	27	10.1	5.7	0.8	
MCL20400474□20□00	0.47	20	14.0	8.0	0.8	
MCL20400474□27□00	0.47	27	11.4	7.0	0.8	
MCL20400684□27□00	0.68	27	14.5	7.0	0.8	
MCL20400824□27□00	0.82	27	15.2	7.6	0.8	
MCL20400105□27□00	1	27	16.1	8.5	0.8	
MCL20400105□32□00	1	32	15.0	7.3	0.8	
MCL20400155□27□00	1.5	27	18.2	10.6	0.8	
MCL20400155□32□00	1.5	32	16.8	9.2	0.8	
MCL20400225□32□00	2.2	32	19.0	11.3	0.8	
MCL20400225□36□00	2.2	36	18.7	9.6	0.8	
MCL20400335□32□00	3.3	32	22.5	13.4	0.8	
MCL20400335□36□00	3.3	36	21.2	12.1	0.8	
MCL20400475□32□00	4.7	32	25.5	16.5	0.8	
MCL20400475□36□00	4.7	36	23.9	14.8	0.8	
MCL20400685□36□00	6.8	36	27.5	18.5	0.8	

■额定值、尺寸表

●额定电压 630VDC、容量偏差 J (±5%)、K (±10%)、M (±20%)

产 品 码	容 量 (μF)	尺 寸 (mm)				备 注
		$W_{\max}$	$H_{\max}$	$T_{\max}$	Φd	
MCL20630223□15□00	0.022	15	7.7	4.2	0.6	
MCL20630333□15□00	0.033	15	9.0	4.7	0.6	
MCL20630473□15□00	0.047	15	9.7	5.4	0.6	
MCL20630683□15□00	0.068	15	10.7	6.4	0.6	
MCL20630104□15□00	0.1	15	12.0	7.7	0.6	
MCL20630104□20□00	0.1	20	11.0	5.1	0.8	
MCL20630154□20□00	0.15	20	12.0	6.2	0.8	
MCL20630224□20□00	0.22	20	13.3	7.4	0.8	
MCL20630224□27□00	0.22	27	11.6	5.8	0.8	
MCL20630334□27□00	0.33	27	14.0	6.5	0.8	
MCL20630474□27□00	0.47	27	15.3	7.8	0.8	
MCL20630684□27□00	0.68	27	17.0	9.6	0.8	
MCL20630684□32□00	0.68	32	16.0	8.3	0.8	
MCL20630105□32□00	1	32	18.7	9.6	0.8	
MCL20630105□36□00	1	36	17.8	8.7	0.8	
MCL20630155□32□00	1.5	32	21.1	12.1	0.8	
MCL20630155□36□00	1.5	36	20.0	11.0	0.8	
MCL20630225□32□00	2.2	32	24.0	15.0	0.8	
MCL20630225□36□00	2.2	36	22.6	13.6	0.8	
MCL20630335□32□00	3.3	32	26.0	14.5	0.8	
MCL20630335□36□00	3.3	36	26.1	17.1	0.8	
MCL20630475□36□00	4.7	36	30.0	21.0	0.8	

■ 备忘录
