

聚丙烯薄膜双面膜电容器

型号: **CBB29**

双面金属化、聚丙烯薄膜、无感结构、阻燃塑壳封装

■特点

- 较低损耗值、高绝缘电阻
- 耐大电流冲击、卓越的高频性能
- 优良的温度特性


■用途

- 应用于高频率和大电流的电子电路
- 广泛应用于节能灯、电子整流器、启动电路等场合
- 广泛应用于一般电子电路中

■产品码构成

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
C	B	B	2	9												
型号					额定电压			容量		品级	脚距	颜色	识别码			

■引脚方式

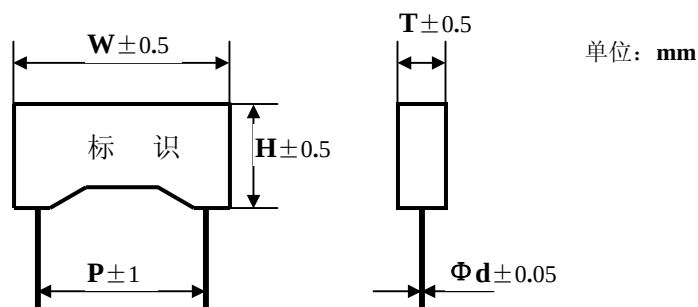

■额定值、尺寸表

●额定电压 250VDC、容量偏差 J ($\pm 5\%$)、K ($\pm 10\%$)

产 品 码	容 量 (μF)	尺 寸 (mm)					备 注
		P	W_{max}	H_{max}	T_{max}	Φd	
CBB29250223□10□00	0.022	10	13	11	4	0.6	
CBB29250333□10□00	0.033	10	13	11	5	0.6	
CBB29250473□10□00	0.047	10	13	12	6	0.6	
CBB29250563□15□00	0.056	15	18	11	5	0.8	
CBB29250683□15□00	0.068	15	18	12	6	0.8	
CBB29250104□15□00	0.10	15	18	13	7	0.8	
CBB29250154□22□00	0.15	22.5	26.5	15	6	0.8	
CBB29250224□22□00	0.22	22.5	26.5	16.5	7	0.8	
CBB29250334□22□00	0.33	22.5	26.5	17	8.5	0.8	
CBB29250474□22□00	0.47	22.5	26.5	19	10	0.8	
CBB29250684□27□00	0.68	27.5	32	20	11	0.8	
CBB29250105□27□00	1.0	27.5	32	23	13	0.8	

■额定值、尺寸表

●额定电压 400VDC、容量偏差 J (±5%)、K (±10%)

产 品 码	容 量 (μF)	尺 寸 (mm)					备 注
		P	W _{max}	H _{max}	T _{max}	Φd	
CBB29400153□10□00	0.015	10	13	11	4	0.6	
CBB29400223□10□00	0.022	10	13	11	5	0.6	
CBB29400333□10□00	0.033	10	13	12	6	0.6	
CBB29400473□15□00	0.047	15	18	11	5	0.8	
CBB29400563□15□00	0.056	15	18	13	7	0.8	
CBB29400683□15□00	0.068	15	18	13.5	7.5	0.8	
CBB29400823□15□00	0.082	15	18	14.5	8.5	0.8	
CBB29400104□15□00	0.10	15	18	16	10	0.8	
CBB29400104□22□00	0.10	22.5	26.5	15	6	0.8	
CBB29400154□22□00	0.15	22.5	26.5	16.5	7	0.8	
CBB29400224□22□00	0.22	22.5	26.5	19	10	0.8	
CBB29400334□22□00	0.33	22.5	26.5	20	11	0.8	
CBB29400474□27□00	0.47	27.5	32	22	11	0.8	
CBB29400564□27□00	0.56	27.5	32	23	13	0.8	
CBB29400684□27□00	0.68	27.5	32	25	14	0.8	

■额定值、尺寸表

●额定电压 630VDC、容量偏差 J (±5%)、K (±10%)

产 品 码	容 量 (μF)	尺 寸 (mm)					备 注
		P	W _{max}	H _{max}	T _{max}	Φd	
CBB29630472□10□00	0.0047	10	13	11	4	0.6	
CBB29630562□10□00	0.0056	10	13	11	4	0.6	
CBB29630822□10□00	0.0068	10	13	11	4	0.6	
CBB29630103□10□00	0.010	10	13	11	4	0.6	
CBB29630153□10□00	0.015	10	13	11	5	0.6	
CBB29630223□10□00	0.022	10	13	12	6	0.6	
CBB29630333□15□00	0.033	15	18	12	6	0.8	
CBB29630473□15□00	0.047	15	18	13.5	7.5	0.8	
CBB29630683□15□00	0.068	15	18	14.5	8.5	0.8	
CBB29630823□15□00	0.082	15	18	16	10	0.8	
CBB29630104□22□00	0.10	22.5	26.5	16.5	7	0.8	
CBB29630154□22□00	0.15	22.5	26.5	19	10	0.8	
CBB29630224□22□00	0.22	22.5	26	20	11	0.8	
CBB29630334□27□00	0.33	27.5	32	22	11	0.8	
CBB29630474□27□00	0.47	27.5	32	25	14	0.8	

■额定值、尺寸表

●额定电压 1000VDC、容量偏差 J (±5%)、K (±10%)

产 品 码	容 量 (μF)	尺 寸 (mm)					备 注
		P	W _{max}	H _{max}	T _{max}	Φd	
CBB291KV222□10□00	0.0022	10	13	11	4	0.6	
CBB291KV332□10□00	0.0033	10	13	11	4	0.6	
CBB291KV472□10□00	0.0047	10	13	11	4	0.6	
CBB291KV682□10□00	0.0068	10	13	11	5	0.6	
CBB291KV822□10□00	0.0082	10	13	11	5	0.6	
CBB291KV103□10□00	0.010	10	13	12	6	0.6	
CBB291KV153□15□00	0.015	15	18	11	5	0.8	
CBB291KV223□15□00	0.022	15	18	12	6	0.8	
CBB291KV333□15□00	0.033	15	18	13	7	0.8	
CBB291KV473□15□00	0.047	15	18	14.5	8.5	0.8	
CBB291KV683□15□00	0.068	15	18	16	10	0.8	
CBB291KV104□22□00	0.10	22.5	26.5	17	8.5	0.8	

■额定值、尺寸表

●额定电压 1250VDC、容量偏差 J (±5%)、K (±10%)

产 品 码	容 量 (μF)	尺 寸 (mm)					备 注
		P	W _{max}	H _{max}	T _{max}	Φd	
CBB291K2152□10□00	0.0015	10	13	11	4	0.6	
CBB291K2222□10□00	0.0022	10	13	11	4	0.6	
CBB291K2332□10□00	0.0033	10	13	11	4	0.6	
CBB291K2472□10□00	0.0047	10	13	11	5	0.6	
CBB291K2682□10□00	0.0068	10	13	12	6	0.6	
CBB291K2822□15□00	0.0082	15	18	11	5	0.8	
CBB291K2103□15□00	0.010	15	18	11	5	0.8	
CBB291K2153□15□00	0.015	15	18	12	6	0.8	
CBB291K2223□15□00	0.022	15	18	13	7	0.8	
CBB291K2333□15□00	0.033	15	18	14.5	8.5	0.8	
CBB291K2473□22□00	0.047	22.5	26.5	16.5	7	0.8	
CBB291K2683□22□00	0.068	22.5	26.5	17	8.5	0.8	
CBB291K2104□22□00	0.10	22.5	26.5	19	10	0.8	
CBB291K2154□27□00	0.15	27.5	32	22	11	0.8	