



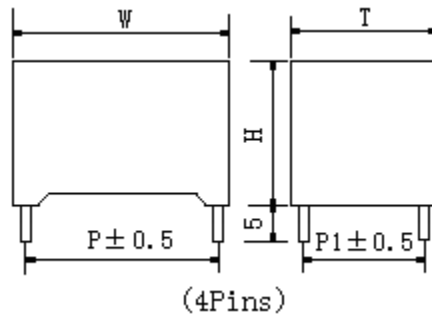

SCMPB IGBT 吸收电容器

SCMPB Snubber Capacitor for IGBT

■ 外形尺寸 Outline Drawing

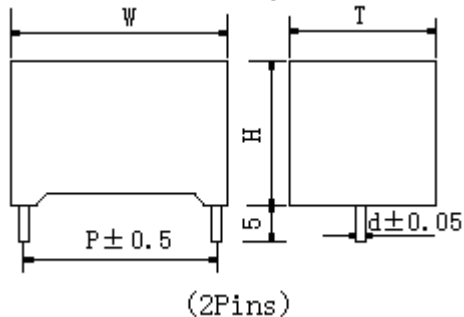

■ 特点

- 广泛应用于高压高频脉冲电路中
- 损耗小，内部温升小良好的电器性能
- 优异的阻燃性能
- 适合作为 IGBT 的吸收电容

■ Features

- Widely used in high voltage ,high frequency circuit.
- Low loss and small interent temperature rise.
- Excellent active and passive flame resistant circuit.
- Especially designed as snubber capacitor for IGBT.

■ 技术要求 Specifications

引用标准 Reference Standards	GB/T17702(IEC61071)
气候类别 Climatic Category	40/85/56
工作温度范围（外壳最高温度点） Operating temperature range (Max. temperature of case surface)	-40~85°C
额定电压 Rated Voltage	630Vdc~3000Vdc
电容量范围 Capacitance Range	0.047μF~9μF (at: 20°C,1KHz)
电容量偏差 Capacitance Tolerance	J(±5%),K(±10%)
耐电压 Voltage Proof	1.5 U _N (10s)
损耗角正切 Dissipation Factor	≤0.0005 (at: 1KHz,20°C)
绝缘电阻 Insulation Resistance	≥100000MΩ (C _N ≤0.33μF) ; ≥30000s (C _N >0.33μF) (at: 20°C,100Vdc,1min)
最大峰值电流 (A) Maximum Peak Current	IP= C _N *dv/dt
工作寿命 Working Lifetime	100000hrs @ θ _{hs} =70°C

■ 技术要求 Specifications

700Vdc (420Vdc)												
Part Number	C _N (μF)	Dimension (mm)						dv/dt (V/μs)	I (A)	ESR @ 100 KHz (mΩ)	I _{max} 100 KHz @ 70°C (A)	L _s (nH)
		W ±1	H ±1	T ±1	P± 0.5	b± 0.5	d± 0.5					
SCMPB700684□□□□□□	0.68	37.0	25.0	15.0	32.5	—	1.2	900	612	6.0	11	23
SCMPB700684□□□□□□	0.68	37.0	25.0	15.0	32.5	5.1	1.0	900	612	5.0	13	23
SCMPB700105□□□□□□	1.0	37.0	30.0	16.0	32.5	—	1.2	900	900	6.0	12	23
SCMPB700105□□□□□□	1.0	37.0	30.0	16.0	32.5	5.1	1.0	900	900	5.0	14	23
SCMPB700125□□□□□□	1.2	37.0	30.0	16.0	32.5	—	1.2	900	1080	5.5	14	23
SCMPB700125□□□□□□	1.2	37.0	30.0	16.0	32.5	5.1	1.0	900	1080	4.5	16	23
SCMPB700155□□□□□□	1.5	37.0	34.0	20.0	32.5	—	1.2	900	1350	5.5	14	23
SCMPB700155□□□□□□	1.5	37.0	34.0	20.0	32.5	10.2	1.0	900	1350	4.5	17	23
SCMPB700185□□□□□□	1.8	37.0	34.0	20.0	32.5	—	1.2	900	1620	5.5	14	23
SCMPB700185□□□□□□	1.8	37.0	34.0	20.0	32.5	10.2	1.0	900	1620	4.5	18	23
SCMPB700205□□□□□□	2.0	42.0	40.0	20.0	37.5	—	1.2	600	1200	5.0	14	29



700Vdc (420Vdc)												
Part Number	C _N (μ F)	Dimension (mm)						dv/dt (V/μs)	I (A)	ESR @ 100 KHz (mΩ)	I _{max} 100 KHz @ 70°C (A)	L _s (nH)
		W ±1	H ±1	T ±1	P± 0.5	b± 0.5	d± 0.5					
SCMPB700205□□□□□□	2.0	42.0	40.0	20.0	37.5	10.2	1.2	600	1200	4.0	18	29
SCMPB700225□□□□□□	2.2	42.0	40.0	20.0	37.5	—	1.2	600	1320	5.0	14	29
SCMPB700225□□□□□□	2.2	42.0	40.0	20.0	37.5	10.2	1.2	600	1320	4.0	18.5	29
SCMPB700255□□□□□□	2.5	42.0	40.0	20.0	37.5	—	1.2	600	1500	5.0	14	29
SCMPB700255□□□□□□	2.5	42.0	40.0	20.0	37.5	10.2	1.2	600	1500	4.0	19	29
SCMPB700305□□□□□□	3.0	42.0	44.0	24.0	37.5	—	1.2	600	1800	5.0	14	29
SCMPB700305□□□□□□	3.0	42.0	44.0	24.0	37.5	12.7	1.2	600	1800	4.0	20	29
SCMPB700335□□□□□□	3.3	42.0	44.0	24.0	37.5	—	1.2	600	1980	4.5	14	29
SCMPB700335□□□□□□	3.3	42.0	44.0	24.0	37.5	12.7	1.2	600	1980	3.5	20	29
SCMPB700405□□□□□□	4.0	42.0	44.0	24.0	37.5	—	1.2	600	2400	4.5	14	29
SCMPB700405□□□□□□	4.0	42.0	44.0	24.0	37.5	12.7	1.2	600	2400	3.5	21	29
SCMPB700475□□□□□□	4.7	42.0	45.0	30.0	37.5	20.3	1.2	600	2820	3.5	23	29
SCMPB700505□□□□□□	5.0	42.0	45.0	30.0	37.5	20.3	1.2	600	3000	3.0	23.5	29
SCMPB700605□□□□□□	6.0	42.0	43.0	42.0	37.5	20.3	1.2	600	3600	3.0	25	29
SCMPB700655□□□□□□	6.5	42.0	43.0	42.0	37.5	20.3	1.2	600	3900	3.0	26	29
SCMPB700655□□□□□□	6.5	57.0	43.5	29.5	52.5	20.3	1.2	360	2340	2.5	24	33
SCMPB700705□□□□□□	7.0	57.0	43.5	29.5	52.5	20.3	1.2	360	2520	2.5	25	33
SCMPB700805□□□□□□	8.0	57.0	50.0	35.0	52.5	20.3	1.2	360	2880	2.5	27	33
SCMPB700905□□□□□□	9.0	57.0	50.0	35.0	52.5	20.3	1.2	360	3240	2.5	28	33
850Vdc (450Vdc)												
SCMPB850474□□□□□□	0.47	37.0	25.0	15.0	32.5	—	1.2	1200	564	6.0	13	23
SCMPB850474□□□□□□	0.47	37.0	25.0	15.0	32.5	5.1	1.0	1200	564	5.0	15	23
SCMPB850684□□□□□□	0.68	37.0	30.0	16.0	32.5	—	1.2	1200	816	6.0	14	23
SCMPB850684□□□□□□	0.68	37.0	30.0	16.0	32.5	5.1	1.0	1200	816	5.0	16	23
SCMPB850105□□□□□□	1.0	37.0	34.0	20.0	32.5	—	1.2	1200	1200	6.0	14	23
SCMPB850105□□□□□□	1.0	37.0	34.0	20.0	32.5	10.2	1.0	1200	1200	5.0	17	23
SCMPB850125□□□□□□	1.2	37.0	34.0	20.0	32.5	—	1.2	1200	1440	6.0	14	23
SCMPB850125□□□□□□	1.2	37.0	34.0	20.0	32.5	10.2	1.0	1200	1440	5.0	17.5	23
SCMPB850155□□□□□□	1.5	37.0	34.0	20.0	32.5	—	1.2	1200	1800	6.0	14	23
SCMPB850155□□□□□□	1.5	37.0	34.0	20.0	32.5	10.2	1.0	1200	1800	5.0	18	23
SCMPB850155□□□□□□	1.5	42.0	40.0	20.0	37.5	—	1.2	750	1125	5.5	14	29
SCMPB850155□□□□□□	1.5	42.0	40.0	20.0	37.5	10.2	1.2	750	1125	4.5	18.5	29
SCMPB850205□□□□□□	2.0	42.0	40.0	20.0	37.5	—	1.2	750	1500	5.5	14	29
SCMPB850205□□□□□□	2.0	42.0	40.0	20.0	37.5	10.2	1.2	750	1500	4.5	19	29
SCMPB850225□□□□□□	2.2	42.0	40.0	20.0	37.5	—	1.2	750	1650	5.5	14	29
SCMPB850225□□□□□□	2.2	42.0	40.0	20.0	37.5	10.2	1.2	750	1650	4.5	19.5	29
SCMPB850255□□□□□□	2.5	42.0	44.0	24.0	37.5	—	1.2	750	1875	5.5	14	29
SCMPB850255□□□□□□	2.5	42.0	44.0	24.0	37.5	12.7	1.2	750	1875	4.5	20	29
SCMPB850305□□□□□□	3.0	42.0	44.0	24.0	37.5	—	1.2	750	2250	5.5	14	29
SCMPB850305□□□□□□	3.0	42.0	44.0	24.0	37.5	12.7	1.2	750	2250	4.5	21	29
SCMPB850335□□□□□□	3.3	42.0	45.0	30.0	37.5	20.3	1.2	750	2475	4.5	21.5	29
SCMPB850405□□□□□□	4.0	42.0	43.0	42.0	37.5	20.3	1.2	750	3000	4.5	22	29
SCMPB850405□□□□□□	4.0	57.0	43.5	29.5	52.5	20.3	1.2	450	1800	4.0	23	33
SCMPB850475□□□□□□	4.7	57.0	43.5	29.5	52.5	20.3	1.2	450	2115	4.0	24.5	33
SCMPB850505□□□□□□	5.0	57.0	43.5	29.5	52.5	20.3	1.2	450	2250	4.0	25	33
SCMPB850605□□□□□□	6.0	57.0	50.0	35.0	52.5	20.3	1.2	450	2700	4.0	26	33
SCMPB850655□□□□□□	6.5	57.0	50.0	35.0	52.5	20.3	1.2	450	2925	4.0	27	33



1000Vdc (500Vdc)												
Part Number	C _N (μF)	Dimension (mm)						dv/dt (V/μs)	I (A)	ESR @ 100 KHz (mΩ)	I _{max} 100 KHz @ 70°C (A)	L _s (nH)
		W ±1	H ±1	T ±1	P± 0.5	b± 0.5	d± 0.5					
SCMPB1KV474□□□□□□	0.47	37.0	25.0	15.0	32.5	—	1.2	1300	611	6.0	12	23
SCMPB1KV474□□□□□□	0.47	37.0	25.0	15.0	32.5	5.1	1.0	1300	611	5.0	14	23
SCMPB1KV684□□□□□□	0.68	37.0	30.0	16.0	32.5	—	1.2	1300	884	6.0	13	23
SCMPB1KV684□□□□□□	0.68	37.0	30.0	16.0	32.5	5.1	1.0	1300	884	5.0	15	23
SCMPB1KV824□□□□□□	0.82	37.0	30.0	16.0	32.5	—	1.2	1300	1066	6.0	14	23
SCMPB1KV824□□□□□□	0.82	37.0	30.0	16.0	32.5	5.1	1.0	1300	1066	5.0	16	23
SCMPB1KV105□□□□□□	1.0	37.0	34.0	20.0	32.5	—	1.2	1300	1300	5.5	14	23
SCMPB1KV105□□□□□□	1.0	37.0	34.0	20.0	32.5	10.2	1.0	1300	1300	4.5	17	23
SCMPB1KV125□□□□□□	1.2	37.0	34.0	20.0	32.5	—	1.2	1300	1560	5.5	14	23
SCMPB1KV125□□□□□□	1.2	37.0	34.0	20.0	32.5	10.2	1.0	1300	1560	4.5	17	23
SCMPB1KV125□□□□□□	1.2	42.0	40.0	20.0	37.5	—	1.2	850	1020	5.5	14	29
SCMPB1KV125□□□□□□	1.2	42.0	40.0	20.0	37.5	10.2	1.2	850	1020	4.5	16	29
SCMPB1KV155□□□□□□	1.5	42.0	40.0	20.0	37.5	—	1.2	850	1275	5.5	14	29
SCMPB1KV155□□□□□□	1.5	42.0	40.0	20.0	37.5	10.2	1.2	850	1275	4.5	16	29
SCMPB1KV205□□□□□□	2.0	42.0	44.0	24.0	37.5	—	1.2	850	1700	5.5	14	29
SCMPB1KV205□□□□□□	2.0	42.0	44.0	24.0	37.5	12.7	1.2	850	1700	4.5	17	29
SCMPB1KV225□□□□□□	2.2	42.0	44.0	24.0	37.5	—	1.2	850	1870	5.0	14	29
SCMPB1KV225□□□□□□	2.2	42.0	44.0	24.0	37.5	12.7	1.2	850	1870	4.0	20	29
SCMPB1KV255□□□□□□	2.5	42.0	45.0	30.0	37.5	20.3	1.2	850	2125	4.0	21	29
SCMPB1KV305□□□□□□	3.0	42.0	45.0	30.0	37.5	20.3	1.2	850	2550	4.0	21.5	29
SCMPB1KV335□□□□□□	3.3	42.0	43.0	42.0	37.5	20.3	1.2	850	2805	4.0	22	29
SCMPB1KV335□□□□□□	3.3	57.0	43.5	29.5	52.5	20.3	1.2	500	1650	4.0	20	33
SCMPB1KV405□□□□□□	4.0	57.0	43.5	29.5	52.5	20.3	1.2	500	2000	4.0	21	33
SCMPB1KV475□□□□□□	4.7	57.0	50.0	35.0	52.5	20.3	1.2	500	2350	4.0	22	33
SCMPB1KV505□□□□□□	5.0	57.0	50.0	35.0	52.5	20.3	1.2	500	2500	4.0	23	33
1200Vdc (600Vdc)												
SCMPB1K2334□□□□□□	0.33	37.0	25.0	15.0	32.5	—	1.2	1500	495	6.5	11.5	23
SCMPB1K2334□□□□□□	0.33	37.0	25.0	15.0	32.5	5.1	1.0	1500	495	5.5	13.5	23
SCMPB1K2474□□□□□□	0.47	37.0	30.0	16.0	32.5	—	1.2	1500	705	6.5	12	23
SCMPB1K2474□□□□□□	0.47	37.0	30.0	16.0	32.5	5.1	1.0	1500	705	5.5	14	23
SCMPB1K2684□□□□□□	0.68	37.0	34.0	20.0	32.5	—	1.2	1500	1020	6.5	13	23
SCMPB1K2684□□□□□□	0.68	37.0	34.0	20.0	32.5	10.2	1.0	1500	1020	5.5	15	23
SCMPB1K2754□□□□□□	0.75	37.0	34.0	20.0	32.5	—	1.2	1500	1125	6.5	14	23
SCMPB1K2754□□□□□□	0.75	37.0	34.0	20.0	32.5	10.2	1.0	1500	1125	5.5	16	23
SCMPB1K2824□□□□□□	0.82	42.0	40.0	20.0	37.5	—	1.2	950	779	6.0	14	29
SCMPB1K2824□□□□□□	0.82	42.0	40.0	20.0	37.5	10.2	1.2	950	779	5.0	16	29
SCMPB1K2105□□□□□□	1.0	42.0	40.0	20.0	37.5	—	1.2	950	950	6.0	14	29
SCMPB1K2105□□□□□□	1.0	42.0	40.0	20.0	37.5	10.2	1.2	950	950	5.0	17	29
SCMPB1K2125□□□□□□	1.2	42.0	44.0	24.0	37.5	—	1.2	950	1140	5.5	14	29
SCMPB1K2125□□□□□□	1.2	42.0	44.0	24.0	37.5	12.7	1.2	950	1140	4.5	17	29
SCMPB1K2155□□□□□□	1.5	42.0	44.0	24.0	37.5	—	1.2	950	1425	5.5	14	29
SCMPB1K2155□□□□□□	1.5	42.0	44.0	24.0	37.5	12.7	1.2	950	1425	4.5	17.5	29
SCMPB1K2205□□□□□□	2.0	42.0	45.0	30.0	37.5	20.3	1.2	950	1900	4.5	18	29
SCMPB1K2225□□□□□□	2.2	42.0	43.0	42.0	37.5	20.3	1.2	950	2090	4.5	19	29
SCMPB1K2255□□□□□□	2.5	42.0	43.0	42.0	37.5	20.3	1.2	950	2375	4.5	20	29
SCMPB1K2225□□□□□□	2.2	57.0	43.5	29.5	52.5	20.3	1.2	600	1320	4.0	18	33
SCMPB1K2255□□□□□□	2.5	57.0	43.5	29.5	52.5	20.3	1.2	600	1500	4.0	19	33
SCMPB1K2305□□□□□□	3.0	57.0	50.0	35.0	52.5	20.3	1.2	600	1800	4.0	20	33
SCMPB1K2335□□□□□□	3.3	57.0	50.0	35.0	52.5	20.3	1.2	600	1980	4.0	21	33
SCMPB1K2355□□□□□□	3.5	57.0	50.0	35.0	52.5	20.3	1.2	600	2400	4.0	22	33



1600Vdc (650Vdc)												
Part Number	C _N (μ F)	Dimension (mm)						dv/dt (V/us)	I (A)	ESR @ 100 KHz (mΩ)	I _{max} 100 KHz @ 70°C (A)	L _s (nH)
		W ±1	H ±1	T ±1	P± 0.5	b± 0.5	d± 0.5					
SCMPB1K6224□□□□□□	0.22	37	25	15	32.5	—	1.2	1900	418	7.5	11	23
SCMPB1K6224□□□□□□	0.22	37	25	15	32.5	5.1	1.0	1900	418	6.5	13	23
SCMPB1K6334□□□□□□	0.33	37	30	16	32.5	—	1.2	1900	627	7.5	11.5	23
SCMPB1K6334□□□□□□	0.33	37	30	16	32.5	5.1	1.0	1900	627	6.5	13.5	23
SCMPB1K6394□□□□□□	0.39	37	33	18	32.5	—	1.2	1900	741	7.0	12	23
SCMPB1K6394□□□□□□	0.39	37	33	18	32.5	5.1	1.0	1900	741	6.0	14	23
SCMPB1K6474□□□□□□	0.47	37	34	20	32.5	—	1.2	1900	893	7.0	13	23
SCMPB1K6474□□□□□□	0.47	37	34	20	32.5	10.2	1.0	1900	893	6.0	15	23
SCMPB1K6684□□□□□□	0.68	42	40	20	37.5	—	1.2	1250	850	4.0	14	29
SCMPB1K6684□□□□□□	0.68	42	40	20	37.5	10.2	1.2	1250	850	4.0	16	29
SCMPB1K6824□□□□□□	0.82	42	44	24	37.5	—	1.2	1250	1025	4.0	14	29
SCMPB1K6824□□□□□□	0.82	42	44	24	37.5	12.7	1.2	1250	1025	4.0	17	29
SCMPB1K6105□□□□□□	1.0	42	45	30	37.5	20.3	1.2	1250	1250	4.0	17.5	29
SCMPB1K6125□□□□□□	1.2	42	45	30	37.5	20.3	1.2	1250	1500	4.0	18	29
SCMPB1K6155□□□□□□	1.5	42	43	42	37.5	20.3	1.2	1250	1875	4.0	19	29
SCMPB1K6155□□□□□□	1.5	57	43.5	29.5	52.5	20.3	1.2	750	1125	4.0	20	33
SCMPB1K6205□□□□□□	2.0	57	50	35	52.5	20.3	1.2	750	1500	4.0	22	33
1700Vdc (675Vdc)												
SCMPB1K7154□□□□□□	0.15	37.0	25.0	15.0	32.5	—	1.2	2000	300	8.5	10	23
SCMPB1K7154□□□□□□	0.15	37.0	25.0	15.0	32.5	5.1	1.0	2000	300	7.5	12	23
SCMPB1K7224□□□□□□	0.22	37.0	30.0	16.0	32.5	—	1.2	2000	440	7.5	11	23
SCMPB1K7224□□□□□□	0.22	37.0	30.0	16.0	32.5	5.1	1.0	2000	440	6.5	13	23
SCMPB1K7334□□□□□□	0.33	37.0	34.0	20.0	32.5	—	1.2	2000	660	7.0	11.5	23
SCMPB1K7334□□□□□□	0.33	37.0	34.0	20.0	32.5	10.2	1.0	2000	660	6.0	13.5	23
SCMPB1K7394□□□□□□	0.39	37.0	34.0	20.0	32.5	—	1.2	2000	780	7.0	12	23
SCMPB1K7394□□□□□□	0.39	37.0	34.0	20.0	32.5	10.2	1.0	2000	780	6.0	14	23
SCMPB1K7474□□□□□□	0.47	42.0	36.0	24.0	37.5	—	1.2	1260	592	6.0	12	29
SCMPB1K7474□□□□□□	0.47	42.0	36.0	24.0	37.5	12.7	1.2	1260	592	5.0	14	29
SCMPB1K7564□□□□□□	0.56	42.0	36.0	24.0	37.5	—	1.2	1260	706	6.0	13	29
SCMPB1K7564□□□□□□	0.56	42.0	36.0	24.0	37.5	12.7	1.2	1260	706	5.0	15	29
SCMPB1K7684□□□□□□	0.68	42.0	44.0	24.0	37.5	—	1.2	1260	857	6.0	14	29
SCMPB1K7684□□□□□□	0.68	42.0	44.0	24.0	37.5	12.7	1.2	1260	857	6.0	16	29
SCMPB1K7824□□□□□□	0.82	42.0	44.0	24.0	37.5	—	1.2	1260	1033	5.5	14	29
SCMPB1K7824□□□□□□	0.82	42.0	44.0	24.0	37.5	12.7	1.2	1260	1033	4.5	17	29
SCMPB1K7105□□□□□□	1.0	42.0	45.0	30.0	37.5	20.3	1.2	1260	126	4.5	18	29
SCMPB1K7125□□□□□□	1.2	42.0	43.0	42.0	37.5	20.3	1.2	1260	1512	4.5	19	29
SCMPB1K7105□□□□□□	1.0	57.0	45.0	25.0	52.5	20.3	1.2	780	780	4.0	16	33
SCMPB1K7125□□□□□□	1.2	57.0	43.5	29.5	52.5	20.3	1.2	780	936	4.0	17	33
SCMPB1K7155□□□□□□	1.5	57.0	43.5	29.5	52.5	20.3	1.2	780	1170	4.0	20	33
SCMPB1K7205□□□□□□	2.0	57.0	50.0	35.0	52.5	20.3	1.2	780	1560	4.0	22	33
2000Vdc (700Vdc)												
SCMPB2KV104□□□□□□	0.10	37.0	25.0	15.0	32.5	—	1.2	2241	224	9.5	10	23
SCMPB2KV104□□□□□□	0.10	37.0	25.0	15.0	32.5	5.1	1.0	2241	224	8.5	12	23
SCMPB2KV154□□□□□□	0.15	37.0	25.0	15.0	32.5	—	1.2	2241	336	9.5	11	23
SCMPB2KV154□□□□□□	0.15	37.0	25.0	15.0	32.5	5.1	1.0	2241	336	8.5	13	23
SCMPB2KV224□□□□□□	0.22	37.0	30.0	16.0	32.5	—	1.2	2241	493	7.5	11.5	23
SCMPB2KV224□□□□□□	0.22	37.0	30.0	16.0	32.5	5.1	1.0	2241	493	6.5	13.5	23
SCMPB2KV334□□□□□□	0.33	37.0	34.0	20.0	32.5	—	1.2	2241	740	7.5	12	23
SCMPB2KV334□□□□□□	0.33	37.0	34.0	20.0	32.5	10.2	1.0	2241	740	6.5	14	23
SCMPB2KV474□□□□□□	0.47	42.0	40.0	20.0	37.5	—	1.2	1300	611	6.0	13	29



2000Vdc (700Vdc)												
Part Number	C _N (μF)	Dimension (mm)						dv/dt (V/μs)	I (A)	ESR @ 100 KHz (mΩ)	I _{max} 100 KHz @ 70°C (A)	L _s (nH)
		W ±1	H ±1	T ±1	P± 0.5	b± 0.5	d± 0.5					
SCMPB2KV474□□□□□□	0.47	42.0	40.0	20.0	37.5	10.2	1.2	1300	611	5.0	15	29
SCMPB2KV564□□□□□□	0.56	42.0	44.0	24.0	37.5	—	1.2	1300	728	6.0	14	29
SCMPB2KV564□□□□□□	0.56	42.0	44.0	24.0	37.5	12.7	1.2	1300	728	5.0	16	29
SCMPB2KV684□□□□□□	0.68	42.0	44.0	24.0	37.5	—	1.2	1300	884	5.5	14	29
SCMPB2KV684□□□□□□	0.68	42.0	44.0	24.0	37.5	12.7	1.2	1300	884	4.5	16.5	29
SCMPB2KV824□□□□□□	0.82	42.0	45.0	30.0	37.5	20.3	1.2	1300	1066	4.5	17	29
SCMPB2KV105□□□□□□	1.0	42.0	43.0	42.0	37.5	20.3	1.2	1300	1300	4.5	19	29
SCMPB2KV105□□□□□□	1.0	57.0	43.5	29.5	52.5	20.3	1.2	850	850	4.5	20	33
SCMPB2KV125□□□□□□	1.2	57.0	43.5	29.5	52.5	20.3	1.2	850	1020	4.5	21	33
SCMPB2KV155□□□□□□	1.5	57.0	50.0	35.0	52.5	20.3	1.2	850	1275	4.5	22	33
2500Vdc (725Vdc)												
SCMPB2K5683□□□□□□	0.068	37.0	25.0	15.0	32.5	—	1.2	3230	220	10.0	10	23
SCMPB2K5683□□□□□□	0.068	37.0	25.0	15.0	32.5	5.1	1.0	3230	220	9.0	12	23
SCMPB2K5104□□□□□□	0.10	37.0	30.0	16.0	32.5	—	1.2	3230	323	10.0	11	23
SCMPB2K5104□□□□□□	0.10	37.0	30.0	16.0	32.5	5.1	1.0	3230	323	9.0	13	23
SCMPB2K5154□□□□□□	0.15	37.0	34.0	20.0	32.5	—	1.2	3230	485	9.5	12	23
SCMPB2K5154□□□□□□	0.15	37.0	34.0	20.0	32.5	10.2	1.0	3230	485	8.5	14	23
SCMPB2K5184□□□□□□	0.18	37.0	34.0	20.0	32.5	—	1.2	3230	581	9.0	13	23
SCMPB2K5184□□□□□□	0.18	37.0	34.0	20.0	32.5	10.2	1.0	3230	581	8.0	15	23
SCMPB2K5224□□□□□□	0.22	42.0	40.0	20.0	37.5	—	1.2	2100	462	5.5	13	29
SCMPB2K5224□□□□□□	0.22	42.0	40.0	20.0	37.5	10.2	1.2	2100	462	4.5	15	29
SCMPB2K5334□□□□□□	0.33	42.0	44.0	24.0	37.5	—	1.2	2100	693	5.5	13	29
SCMPB2K5334□□□□□□	0.33	42.0	44.0	24.0	37.5	12.7	1.2	2100	693	4.5	15.2	29
SCMPB2K5474□□□□□□	0.47	42.0	45.0	30.0	37.5	20.3	1.2	2100	987	4.0	16	29
SCMPB2K5684□□□□□□	0.68	42.0	43.0	42.0	37.5	20.3	1.2	2100	1428	4.0	16.5	29
SCMPB2K5684□□□□□□	0.68	57.0	43.5	29.5	52.5	20.3	1.2	1200	816	4.0	17	33
SCMPB2K5105□□□□□□	1.0	57.0	50.0	35.0	52.5	20.3	1.2	1200	1200	4.0	17.5	33
3000Vdc (750Vdc)												
SCMPB3KV473□□□□□□	0.047	37.0	25.0	15.0	32.5	—	1.2	3361	158	10.5	9	23
SCMPB3KV473□□□□□□	0.047	37.0	25.0	15.0	32.5	5.1	1.0	3361	158	9.5	11	23
SCMPB3KV683□□□□□□	0.068	37.0	30.0	16.0	32.5	—	1.2	3361	229	10.0	10	23
SCMPB3KV683□□□□□□	0.068	37.0	30.0	16.0	32.5	5.1	1.0	3361	229	9.0	12	23
SCMPB3KV104□□□□□□	0.10	37.0	34.0	20.0	32.5	—	1.2	3361	336	9.5	11	23
SCMPB3KV104□□□□□□	0.10	37.0	34.0	20.0	32.5	10.2	1.0	3361	336	8.5	13	23
SCMPB3KV154□□□□□□	0.15	37.0	34.0	20.0	32.5	—	1.2	3361	504	9.0	11.5	23
SCMPB3KV154□□□□□□	0.15	37.0	34.0	20.0	32.5	10.2	1.0	3361	504	8.0	13.5	23
SCMPB3KV224□□□□□□	0.22	42.0	40.0	20.0	37.5	—	1.2	2050	451	7.0	12	29
SCMPB3KV224□□□□□□	0.22	42.0	40.0	20.0	37.5	10.2	1.2	2050	451	6.0	14	29
SCMPB3KV334□□□□□□	0.33	42.0	45.0	30.0	37.5	20.3	1.2	2050	677	5.5	14.5	29
SCMPB3KV474□□□□□□	0.47	42.0	43.0	42.0	37.5	20.3	1.2	2050	964	5.0	16	29
SCMPB3KV474□□□□□□	0.47	57.0	43.5	29.5	52.5	20.3	1.2	1200	564	5.0	16.5	33
SCMPB3KV684□□□□□□	0.68	57.0	50.0	35.0	52.5	20.3	1.2	1200	816	5.0	17	33
SCMPB3KV824□□□□□□	0.82	57.0	50.0	35.0	52.5	20.3	1.2	1200	984	4.5	18	33

■ 产品编码说明 Product Code

S C M P B

型号
Series code

□ □ □

电压
Voltage

□ □ □

标称容量
Rate
capacitance
value

□

品级
Capacitance
tolerance

□ □

脚距
Lead
Spacing

□

颜色
Color

□ □

识别码
Identification
Code